


1.25系列同步马达选型规则/Group 1.25 Flow divider Ordering Code Rules

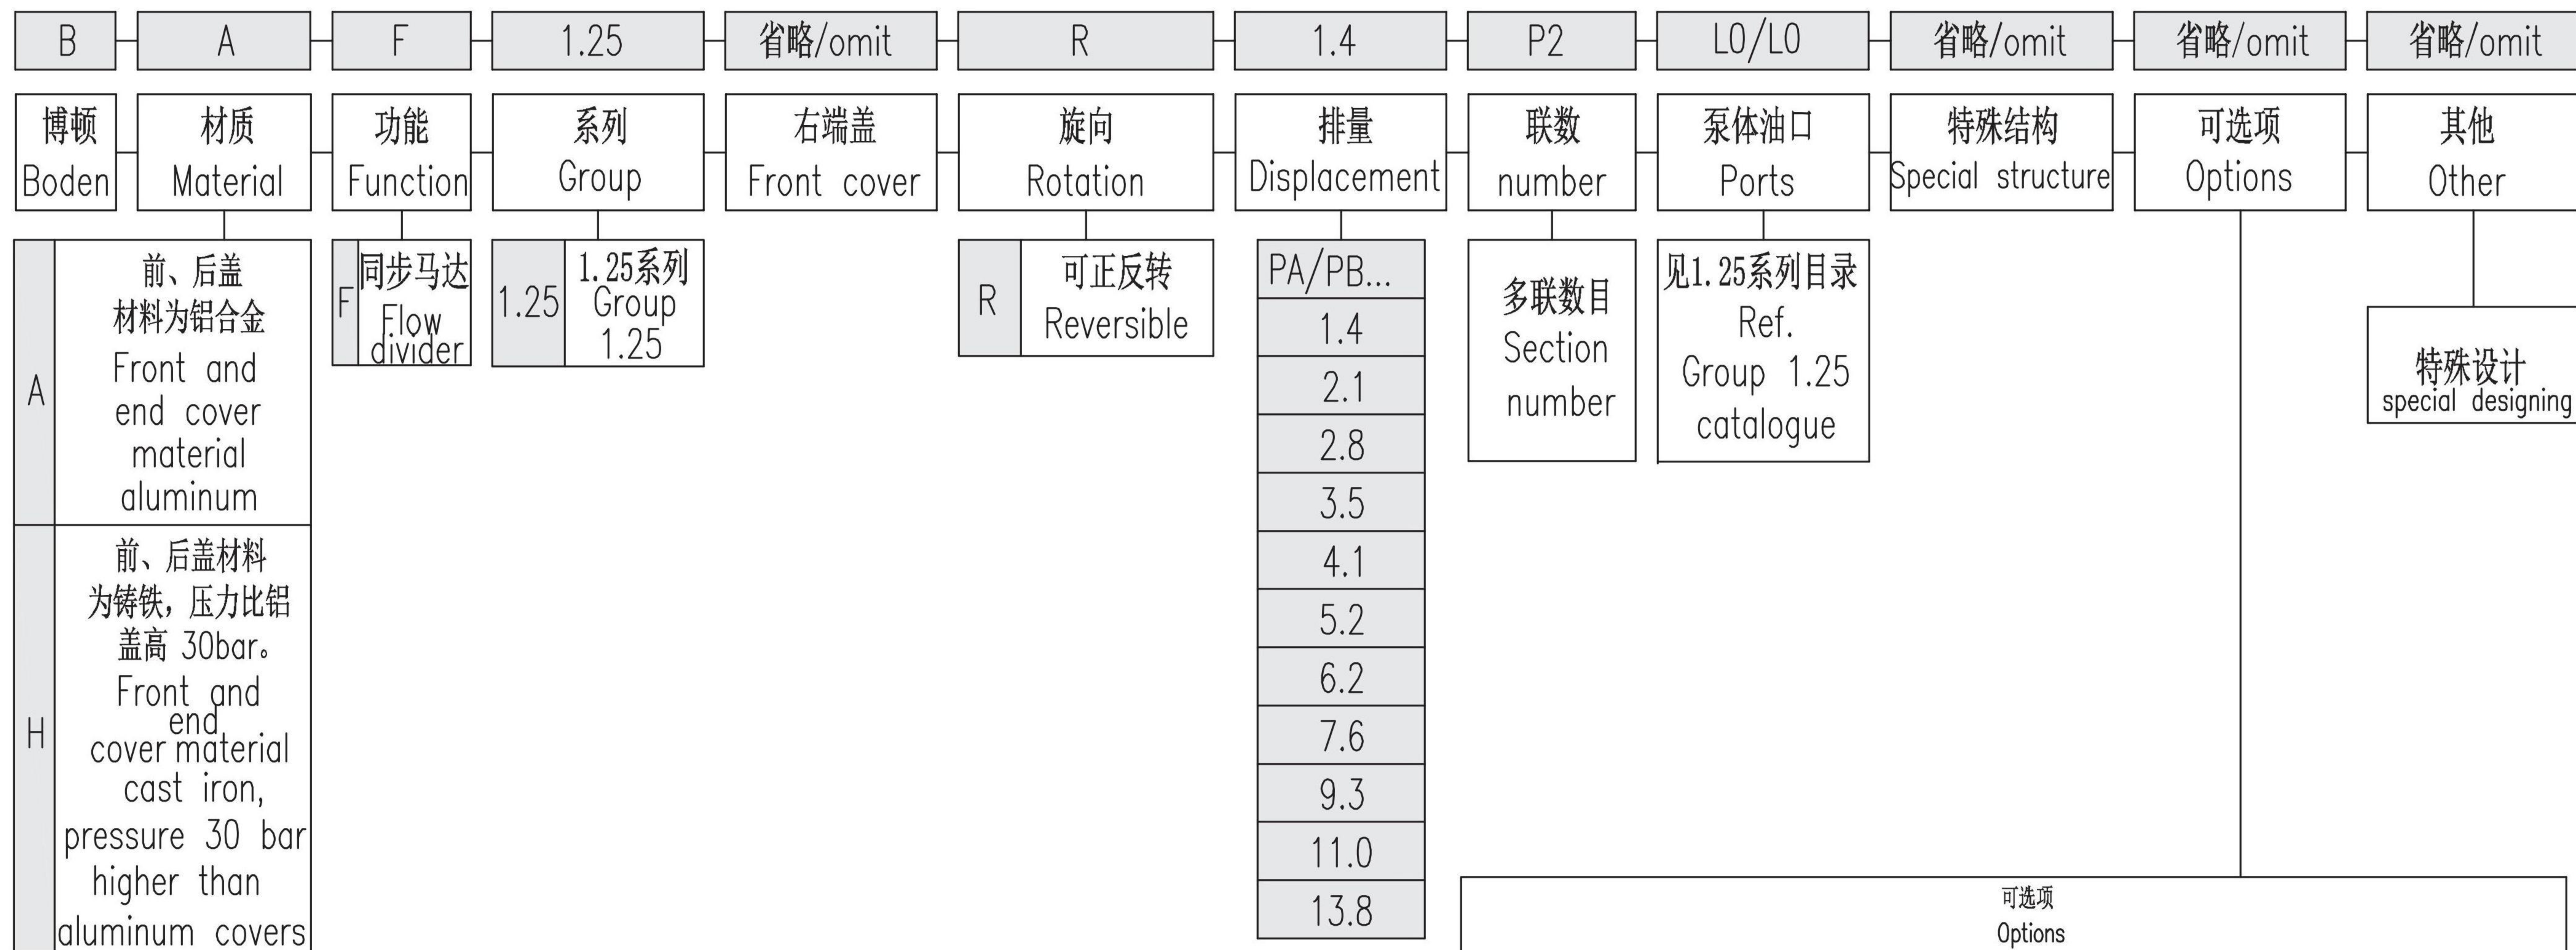

| 可选项 Options | |
|---|---|
| | 省略-温度范围在-10℃~+80℃, 进油口最高绝对压力为3bar。 Omit-Range between -10℃ and +80℃, inlet pressure up to max. 3 bar absolute. |
| V | 适用于高温介质, 温度范围在-10℃~+120℃。 Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃. |
| H | 适用于低温介质, 温度范围在-40℃~+80℃。 Version suitable for fluid at low-temperatures, range between -40℃ and +80℃. |
| N | 适用于进油口最大绝对压力3~10bar。 Version suitable for inlet pressure up to max. 3 and 10 bar absolute. |
| 如需其它特殊选项请联系本公司工程师 For other special options, please contact our engineers. | |

如需其它型号请见详情页或联系本公司工程师
If you need other models, please see the details page or contact our engineers.